

## OP-B1M31-10

### 155Mbps SFP, 1310nm Singlemode 10KM LC

#### Features

- Support 155Mb/s data rate
- Tx1310nm FP laser transmitter and PIN photodetector
- Single 3.3V power supply
- Hot-pluggable SFP footprint
- Duplex LC connector interface
- Metal Enclosure for lower EMI
- Up to 10km on SMF
- Compliant with SFP MSA and digital diagnostic SFF-8472
- Class 1 laser safety certified
- Compliant with RoHS



#### Applications

- SDH STM-1
- SONET OC-3
- Other Optical Links

#### Description

OPTINET Small Form Factor Pluggable (SFP) transceiver is designed for data communication on Single-mode fiber and transmission distance up to 10km. The transceiver consists of five sections: the FP laser transmitter, the LD driver, the PIN photodiode, the limiting amplifier and the MCU control unit. And it compatible with Small Form Factor Pluggable Multi-Sourcing Agreement (MSA).

#### Absolute Maximum Ratings

| Parameter           | Symbol | Min. | Max. | Unit |
|---------------------|--------|------|------|------|
| Storage Temperature | Ts     | -40  | 85   | °C   |
| Supply Voltage      | Vcc    | -0.5 | 4    | V    |
| Operating Humidity  | RH     | 5    | 95   | %    |
| Power Consumption   |        |      | 1.2  | W    |

#### Recommended Operating Conditions

| Parameter             |                 | Symbol | Min. | Typical | Max. | Unit |
|-----------------------|-----------------|--------|------|---------|------|------|
| Operating Temperature | Case Commercial | Tc     | 0    |         | 70   | °C   |
|                       | Extended        | Tc     | -10  |         | 85   | °C   |
|                       | Industrial      | Tc     | -40  |         | 85   | °C   |



|                      |     |      |     |      |      |
|----------------------|-----|------|-----|------|------|
| Power Supply Voltage | Vcc | 3.15 | 3.3 | 3.45 | V    |
| Power Supply Current | Icc |      |     | 300  | mA   |
| Data Rate            | -   |      | 155 |      | Mbps |

### Optical Characteristics

| Parameter                           | Symbol                         | Min. | Typical | Max. | Unit |
|-------------------------------------|--------------------------------|------|---------|------|------|
| <b>Transmitter</b>                  |                                |      |         |      |      |
| Centre Wavelength                   | $\lambda_c$                    | 1260 | 1310    | 1360 | nm   |
| Average Output Power                | P <sub>o</sub>                 | -15  |         | -3   | dBm  |
| Extinction Ratio                    | E <sub>r</sub>                 | 10   |         |      | dB   |
| Spectral Width(RMS)                 | $\Delta\lambda$                |      |         | 7    | nm   |
| Optical Rise/Fall Time<br>(20%~80%) | t <sub>r</sub> /t <sub>f</sub> |      |         | 2    | ns   |
| Total Jitter                        | T <sub>j</sub>                 |      |         | 0.1  | UI   |
| Output Optical Eye Mask             | Compliant with ITU-T G.957     |      |         |      |      |
| <b>Receiver</b>                     |                                |      |         |      |      |
| Center Wavelength                   | $\lambda_c$                    | 1260 | 1310    | 1360 | nm   |
| Receiver Sensitivity                | S                              |      |         | -32  | dBm  |
| Receiver Overload                   | P <sub>in</sub>                | -8   |         |      | dBm  |
| LOS De-Assert                       | LOS <sub>D</sub>               |      |         | -30  | dBm  |
| LOS Assert                          | LOS <sub>A</sub>               | -42  |         |      | dBm  |
| LOS Hysteresis                      |                                | 1    |         | 5    | dB   |

Notes:


1. The optical power is launched into 9/125 $\mu$ m SMF
2. PECL input, internally AC-coupled and terminated
3. Filtered measured with a PRBS 2<sup>23</sup>-1 test pattern @155Mbps, BER $\leq$ 1x10<sup>-10</sup>

### Electrical Characteristics

| Parameter                     | Symbol          | Min. | Typ. | Max. | Unit |
|-------------------------------|-----------------|------|------|------|------|
| <b>Transmitter</b>            |                 |      |      |      |      |
| Data Input Swing Differential | V <sub>in</sub> | 400  |      | 2000 | mV   |
| Input Differential Impedence  | Z <sub>in</sub> | 85   | 100  | 115  | ohm  |
| TX Disable                    | Disable         | 2    |      | Vcc  | V    |
|                               | Enable          | 0    |      | 0.8  | V    |
| TX Fault                      | Fault           | 2    |      | Vcc  | V    |
|                               | Normal          | 0    |      | 0.5  | V    |

| Receiver                       |      |      |     |  |         |
|--------------------------------|------|------|-----|--|---------|
| Data Output Swing Differential |      | Vout | 400 |  | 2000 mV |
| Rx_LOS                         | High |      | 2   |  | Vcc V   |
|                                | Low  |      | 0   |  | 0.8 V   |

### Digital Diagnostic Memory Map

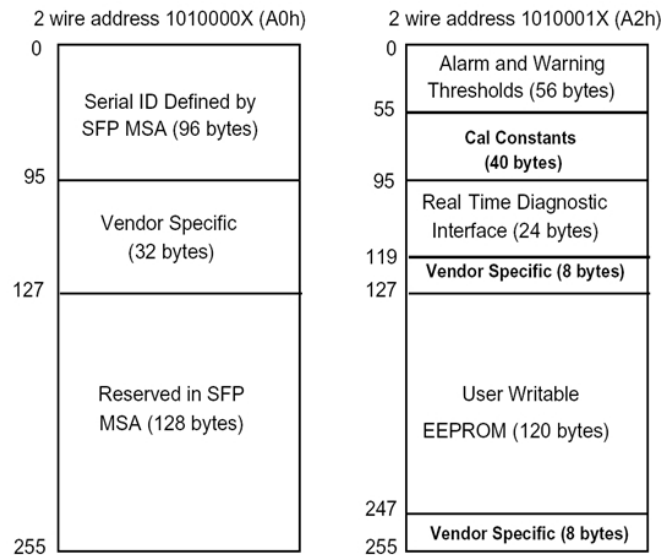

The SFP MAS defines a 256-byte memory map in EEPROM describing the transceiver's manufacturer, part no, standard interfaces, serial no and other information, which is accessible over a 2 wire serial interface at address A0h. The memory contents are shown in below table:

| Addr. | Field Size (Bytes) | Name of Field   | Hex | Description   |
|-------|--------------------|-----------------|-----|---------------|
| 0     | 1                  | Identifier      | 03  | SFP           |
| 1     | 1                  | Ext. Identifier | 04  | MOD4          |
| 2     | 1                  | Connector       | 07  | LC            |
| 3-10  | 8                  | Transceiver     | XXX | 100Base-LX    |
| 11    | 1                  | Encoding        | 01  | 4B5B          |
| 12    | 1                  | BR, nominal     | 0D  | 155Mb/s       |
| 13    | 1                  | Reserved        | 00  |               |
| 14    | 1                  | Length (9um)-km |     |               |
| 15    | 1                  | Length (9um)    |     |               |
| 16    | 1                  | Length (50um)   |     | 10KM          |
| 17    | 1                  | Length (62.5um) |     |               |
| 18    | 1                  | Length (copper) | 00  | Not Compliant |



|        |     |                               |  |  |
|--------|-----|-------------------------------|--|--|
| 19     | 1   | Reserved                      | 00   |  |
| 20-35  | 16  | Vendor name                   | 57 49 4E 54 4F 50 20 20<br>20 20 20 20 20 20 20 20 |  |
| 36     | 1   | Reserved                      | 00   |  |
| 37-39  | 3   | Vendor OUI                    | 00 00 00   |  |
| 40-55  | 16  | Vendor PN                     | xx xx xx xx xx xx xx xx<br>xx xx xx xx xx xx xx xx | 根据公司(ASC II)   |
| 56-59  | 4   | Vendor rev                    | 31 2E 30 20  | V1.0   |
| 60-61  | 2   | Wavelength                    | 06 0E  | 1310nm   |
| 62     | 1   | Reserved                      | 00   |  |
| 63     | 1   | CC BASE                       | XX   | Check sum of bytes<br>0~62   |
| 64-65  | 2   | Options                       | 00 1A  | LOS, TX_FAULT and<br>TX_DISABLE  |
| 66     | 1   | BR, max                       | 00   |  |
| 67     | 1   | BR, min                       | 00   |  |
| 68-83  | 16  | Vendor SN                     | xx xx xx xx xx xx xx xx<br>xx xx xx xx xx xx xx xx | ASC II   |
| 84-91  | 8   | Vendor date code              | xx xx xx xx xx xx 20 20                            | Year, Month, Day   |
| 92     | 1   | Diagnostic Monitoring<br>type | XX   | Diagnostics (External.<br>Cal)   |
| 93     | 1   | Enhanced option               | XX   | Optional Alarm/warning<br>flags, Soft TX_FAULT<br>and Soft TX_LOS<br>monitoring) |
| 94     | 1   | SFF-8472                      | XX   | Diagnostics (SFF-8472<br>Rev 9.4)  |
| 95     | 1   | CC_EXT                        | XX   | Check sum of bytes<br>64~94  |
| 96-255 | 160 | Vendor specific               |  |  |

The digital diagnostic monitoring interface also defines another 256-byte memory map in EEPROM, which makes use of the 8 bit address 1010001X (A2h). It allows real-time access to transceiver's working temperature, laser bias current, transmitted optical power, receiver sensitivity and supply voltage. Please see Figure 2. for detailed information:

| Parameter   |            | Range       | Accuracy | Calibration |
|-------------|------------|-------------|----------|-------------|
| Temperature | Commercial | 0 to 70°C   | ±3°C     | Internal    |
|             | Extended   | -10 to 80°C | ±3°C     | Internal    |

|              |            |             |      |          |
|--------------|------------|-------------|------|----------|
|              | Industrial | -40 to 85°C | ±3°C | Internal |
| Voltage      |            | 3.0 to 3.6V | ±10% | Internal |
| Bias Current |            | 0 to 100mA  | ±10% | Internal |
| Tx Power     |            |             | ±3dB | Internal |
| Rx Power     |            |             | ±3dB | Internal |

## Pin Definitions

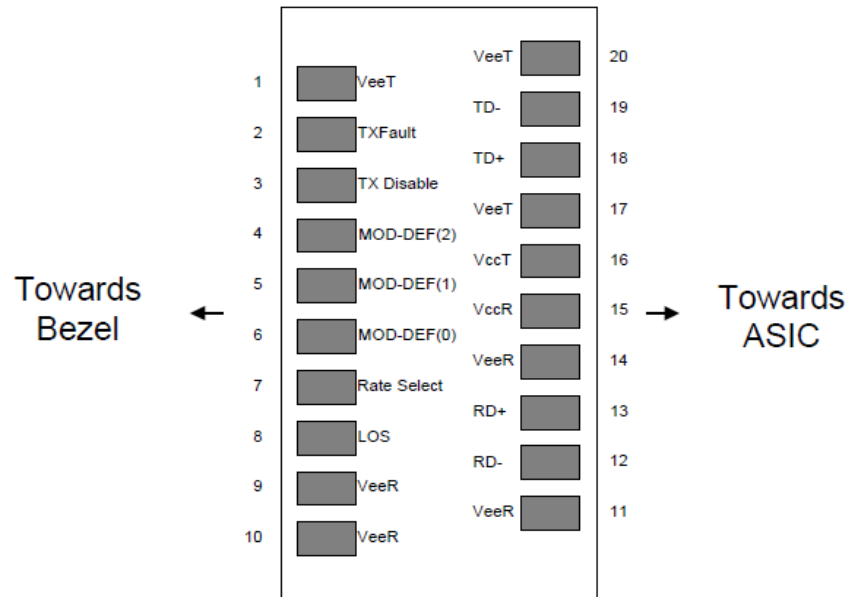


Diagram of Connector Block Pins on Host Board

| Pins | Name        | Description                  | NOTE |
|------|-------------|------------------------------|------|
| 1    | VeeT        | Transmitter Ground           |      |
| 2    | Tx Fault    | Transmitter Fault Indication | 1    |
| 3    | Tx Disable  | Transmitter Disable          | 2    |
| 4    | MOD DEF2    | Module Definition 2          | 3    |
| 5    | MOD DEF1    | Module Definition 1          | 3    |
| 6    | MOD DEF0    | Module Definition 0          | 3    |
| 7    | Rate Select | Not Connected                |      |
| 8    | LOS         | Loss of Signal               | 4    |
| 9    | VeeR        | Receiver Ground              |      |
| 10   | VeeR        | Receiver Ground              |      |
| 11   | VeeR        | Receiver Ground              |      |
| 12   | RD-         | Inv. Received Data Output    | 5    |
| 13   | RD+         | Received Data Output         | 5    |




|    |      |                          |   |
|----|------|--------------------------|---|
| 14 | VeeR | Receiver Ground          |   |
| 15 | VccR | Receiver Power           |   |
| 16 | VccT | Transmitter Power        |   |
| 17 | VeeT | Transmitter Ground       |   |
| 18 | TD+  | Transmit Data Input      | 6 |
| 19 | TD-  | Inv. Transmit Data Input | 6 |
| 20 | VeeT | Transmitter Ground       |   |


**Notes:**

1. TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
2. TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:  
Low (0~0.8V): Transmitter on  
(>0.8V, <2.0V): Undefined  
High (2.0~3.3V): Transmitter Disabled  
Open: Transmitter Disabled
3. MOD-DEF 0,1,2 are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.  
MOD-DEF 0 is grounded by the module to indicate that the module is present  
MOD-DEF 1 is the clock line of two wire serial interface for serial ID  
MOD-DEF 2 is the data line of two wire serial interface for serial ID
4. LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; logic 1 indicates loss of signal. In the low state, the output will be pulled to less than 0.8V.
5. These are the differential receiver output. They are internally AC-coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES.
6. These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module.

## Recommended Interface Circuit

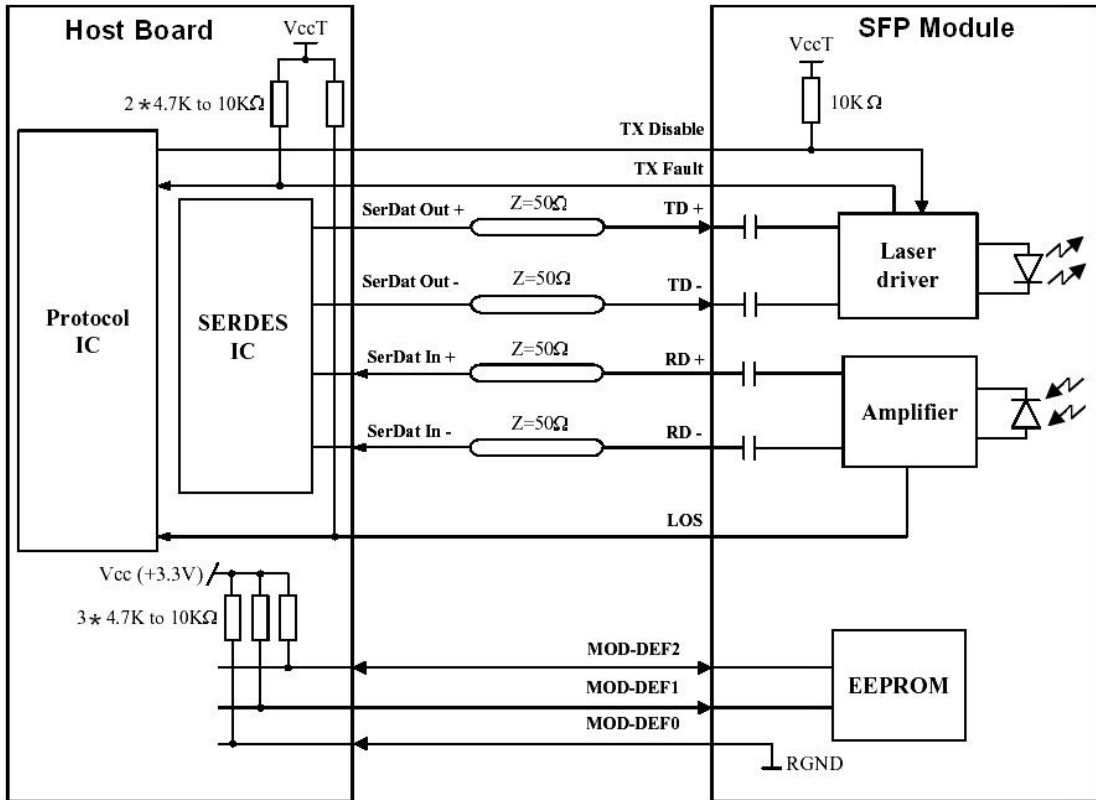

## Mechanical Diagram

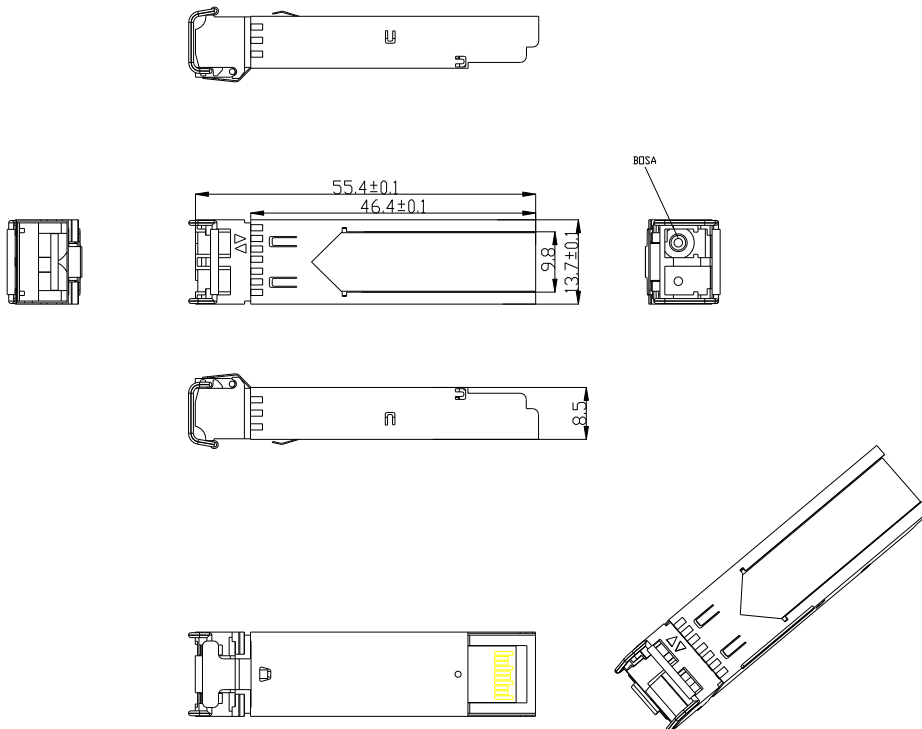



Optinet Technology Co., Ltd  
Add: 4th Floor Xiufeng Industrial Park, Buji Street, Longgang District, Shenzhen, China 518112  
Tel: +86-755-28471034 Fax: +86-755-61824579  
www.optinetec.com sales@optinetec.com

## Ordering Information

| Part No       | Data Rate | Wavelength | Fiber | Reach | Temp     | DDM |
|---------------|-----------|------------|-------|-------|----------|-----|
| OP-B1M31-10   | 155Mb/s   | 1310       | SMF   | 10KM  | 0~70°C   | No  |
| OP-B1M31-10E  | 155Mb/s   | 1310       | SMF   | 10KM  | -10~80°C | No  |
| OP-B1M31-10I  | 155Mb/s   | 1310       | SMF   | 10KM  | -45~85°C | No  |
| OP-B1M31-10D  | 155Mb/s   | 1310       | SMF   | 10KM  | 0~70°C   | Yes |
| OP-B1M31-10ED | 155Mb/s   | 1310       | SMF   | 10KM  | -10~80°C | Yes |
| OP-B1M31-10ID | 155Mb/s   | 1310       | SMF   | 10KM  | -45~85°C | Yes |