

OP-S25G-DX

25G SFP28 Direct Attach Passive Copper Cables

Overview

OPTINET DAC 25G SFP28 cable assemblies are high-performance, cost effective I/O solutions for 25Gb Ethernet and Fibre Channel applications. SFP28 passive copper modules allow hardware manufacturers to achieve high port density, configurability and utilization at a very low cost and to reduce power budget. The high-speed cable assemblies meet and exceed the performance and reliability requirements stipulated by Gigabit Ethernet and Fibre Channel industry standard.

Features

- Support for multi-gigabit data rates up to 25Gbps
- Hot-pluggable
- I/O Connector designed for high speed differential signal applications
- Improved Pluggable Form Factor(IPF) compliant for enhanced EMI/EMC performance
- Compatible to SFP+ MSA
- Temperature Range: 0~ 70 °C
- Comply with RoHS 2.0



Applications

- High capacity I/O in Storage Area Networks, Network Attached Storage, and Storage Servers
- Switched fabric I/O such as ultra high bandwidth switches and routers
- Data center cabling infrastructure
- High density connections between networking equipment


Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Storage Ambient Temperature		-40		+85	°C
Operating Case Temperature	Tc	-40		+85	°C

Pin Descriptions

Pin	Logic	Symbol	Name/Description	Notes
1		VeeT	Transmitter Ground	
2	LV-TTL-O	TX_Fault	N/A	1
3	LV-TTL-I	TX_DIS	Transmitter Disable	2
4	LV-TTL-I/O	SDA	Tow Wire Serial Data	
5	LV-TTL-I	SCL	Tow Wire Serial Clock	
6		MOD_DEF0	Module present, connect to VeeT	
7	LV-TTL-I	RS0	N/A	1
8	LV-TTL-O	LOS	LOS of Signal	2
9	LV-TTL-I	RS1	N/A	1
10		VeeR	Receiver Ground	
11		VeeR	Receiver Ground	
12	CML-O	RD-	Receiver Data Inverted	
13	CML-O	RD+	Receiver Data Non-Inverted	
14		VeeR	Receiver Ground	
15		VccR	Receiver Supply 3.3V	
16		VccT	Transmitter Supply 3.3V	
17		VeeT	Transmitter Ground	
18	CML-I	TD+	Transmitter Data Non-Inverted	
19	CML_I	TD-	Transmitter Data Inverted	
20		VeeT	Transmitter Ground	

Mechanical Dimensions

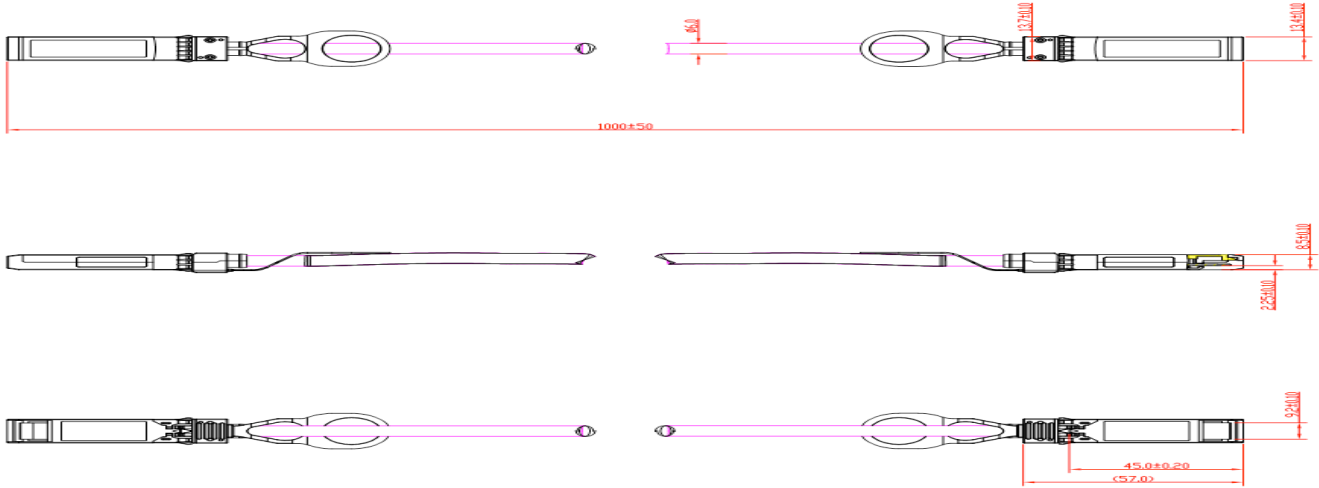

Ordering information

Part Number	Product Description
OP-S25G-D1	SFP28 Direct Attach Passive Cable 1m, AWG:30 , 0°C ~ +70°C
OP-S25G-D2	SFP28 Direct Attach Passive Cable 2m, AWG:30 , 0°C ~ +70°C
OP-S25G-D3	SFP28 Direct Attach Passive Cable 3m, AWG:30 , 0°C ~ +70°C
OP-S25G-D5	SFP28 Direct Attach Passive Cable 5m, AWG:24 , 0°C ~ +70°C
OP-S25G-D7	SFP28 Direct Attach Passive Cable 7m, AWG:24 , 0°C ~ +70°C

Note: Diameter and length can be customized